


# Hydraulic/Foot operated type

## HLH Handle-less



Load capacity: 220 to 441 lbs




HLH-200HL

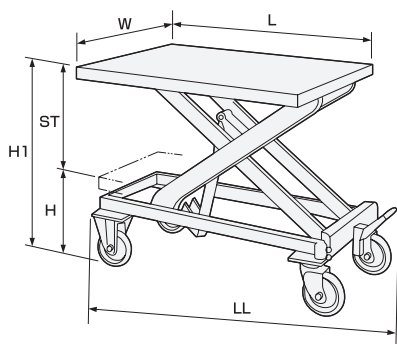

[Handle-less type pump diagram]

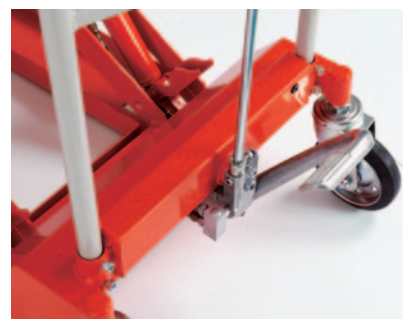

Useful for carrying long loads such as panels and poles.

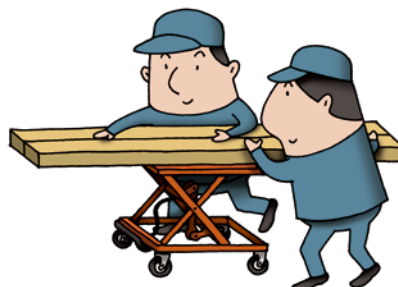

Unit: inch

	Model	Load capacity	Table dimensions W × L	Stroke (ST)	Table height (H to H1)	Overall length (LL)	Wheels	Number of pump steps	Deadweight
Handle-less	HLH-100HL	220 lbs	13.8×22.4	15.7	7.9 to 23.6	30.1	φ3.9 rubber	Approx. 12 times	41.9 lbs
	HLH-120HL	264 lbs	15.7×28.3	19	9.3 to 28.3	36.6	φ3.9 rubber	Approx. 22 times	66.2 lbs
	HLH-200HL	441 lbs	19.7×31.5	21.3	10.3 to 31.4	39.8	φ3.9 rubber	Approx. 36 times	99.2 lbs

\* This cart is also available with bellows (except HLH-100HL).

With the handle removed from the standard type, this cart is ideal for loading long items.

### Major features of the HLH Series

- ☐ Hydraulic cylinder
- ☐ Swivel casters with brakes  
(double stopper for models other than HLH-100HL and HLH-120HL)
- ☐ Foot pedal type
- ☐ Comes with an overloading prevention device \*1

### Option

- ☐ Pump with a rapid traverse device

### Major specifications

Oil used	Turbine oil: ISO VG22
Materials	Pump : Urethane type resin spray painting
	Cylinder : Urethane type resin spray painting
	Main body : Baked melamine / Powder coating

\*1 The lifter will not elevate when overloaded.