

Mechanical Lift (Ball Screw, Electric Type)

MLSB Ultra-low & Slim Type

Load capacity: 220 lbs


It is possible to directly place a hand-pushed cart or a flat cart currently in use on top of the lift.
Eliminates the need to pile up items repeatedly for work efficiency.

Major features of the MLSB Series


- ☐ Ultra-low platform
- ☐ Stand-alone unit
- ☐ Foot switch cord: 78.7in.
- ☐ Power cord: 118.1in. (E-type)

Major specifications

* When the table is raised from the lowest position to the highest position, the table shifts up to 1.1in. in the longitudinal direction (direction of L).

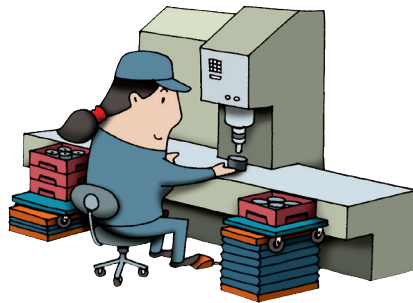

MLSB-100-2007

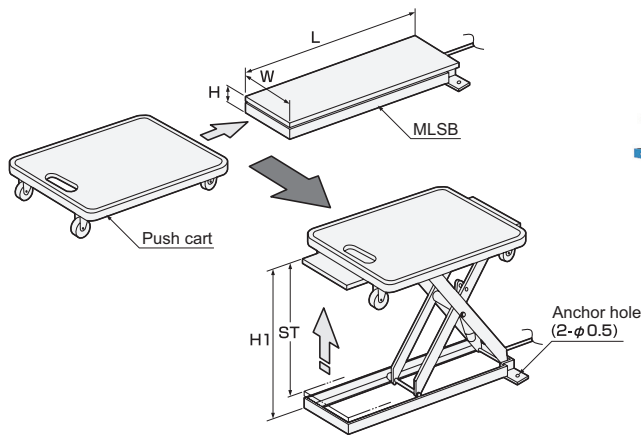

Adjust the height for work efficiency and improve productivity



Unit: inch

	Model	Load capacity	Table dimensions W × L	Stroke (ST)	Table height (H to H1)	Lifting duration (in seconds)	Lowering duration (in seconds)	Motor Output (W)	Deadweight
Electric ball screw type	MLSB-100-2007	220 lbs	7.9×27.6	19.6	3.2 to 22.8	12	12	70	62 lbs
	MLSB-100-2507		9.8×27.6						66 lbs
	MLSB-100-3007		11.8×27.6						71 lbs
	MLSB-100-2009		7.9×35.4	25.5	3.2 to 28.7	15	15		75 lbs
	MLSB-100-2509		9.8×35.4						79 lbs
	MLSB-100-3009		11.8×35.4						84 lbs

☐ maximum usage frequency: 30 times per hour